


X LOCK

INSTALLATION GUIDE



BLE KEYPAD 02

// DIMENSIONS OF THE KEYPAD

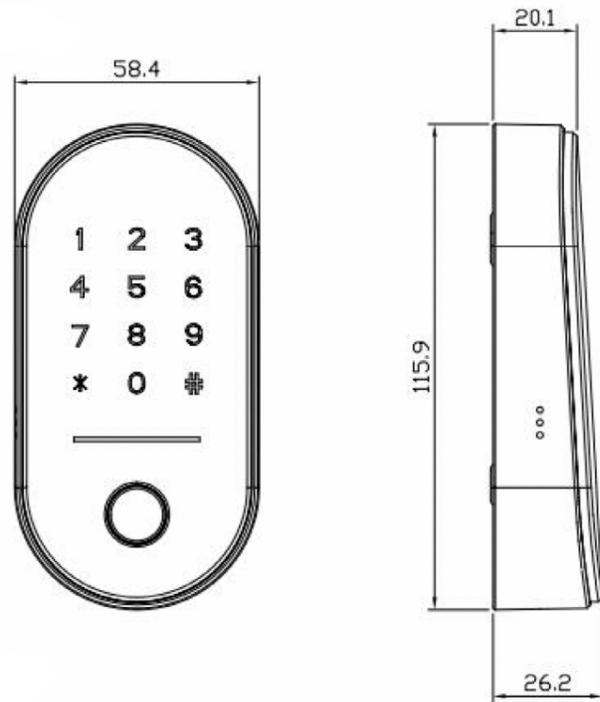

// SETUP

The XLOCK Bluetooth Wireless Keypad is the perfect solution for controlling garage doors and door openers. Its seamless connection to a relay offers flexible and secure operation.

Features and Benefits:

- Versatile Programming Options: Manage fingerprints, NFC tags, and PIN codes easily via the XLOCK app.
- Compatibility: Ideal for operating relays for garage doors, door openers, and more.
- Wireless Connection: Quick and straightforward integration thanks to Bluetooth technology.
- Secure and Efficient: Access data is securely managed to ensure reliable access control.


With the XLOCK Bluetooth Wireless Keypad, you can enjoy maximum convenience and security—perfect for both private and commercial applications.

- Wireless Bluetooth keyboard
- Includes adhesive strips and base plate for wall mounting
- Program up to 200 NFC Tags (reads Mifare)
- Program up to 150 PIN Codes at the same time
- Program up to 100 fingerprints
- Remote unlocking and Remote programming possible via Gateway (to be ordered separately)
- Acceptance alarm integrated
- Range up to 20 meters via Bluetooth
- Battery: CR123A Lithium (to be ordered separately)

// ADD A LOCK

The lock should be added via the app, entering 'addition mode' by pressing a button on the keypad.


1. Click the Menu in the lower right corner, and then click New Lock.
2. Search for new locks. Awakening your lock by touching the keypad or fingerprint area.
3. Click "+" to program the lock.
4. Name your lock and click ADD. The lock is now added and will appear in your list.

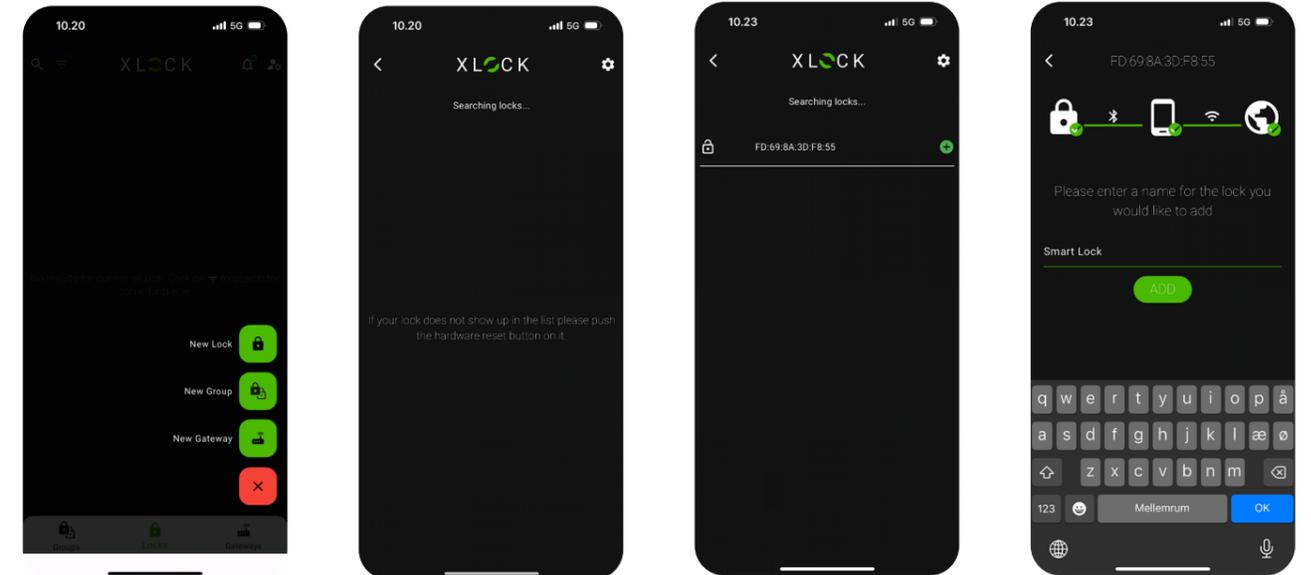

// ADMIN PIN

How to find the Admin PIN on your lock.


1. Choose Keypad 02. The admin PIN can be found under "Pincodes" in the app.
2. Press the shield in the upper right corner.
3. For Keypad 02, the admin PIN will always be 7 digits long.

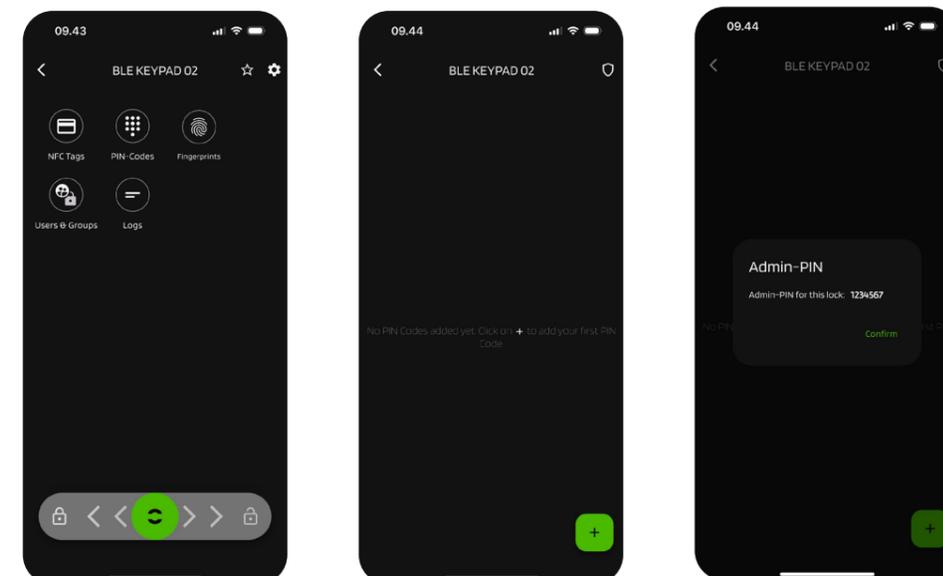


// ADD KEYPAD 02

XLOCK offers more than just advanced security solutions. Our range of accessories is designed to complement and enhance your access control systems, providing convenience and flexibility for all users. Note: one accessory can be connected to one lock.


1. Go into the lock's settings and click Manage Accessory.

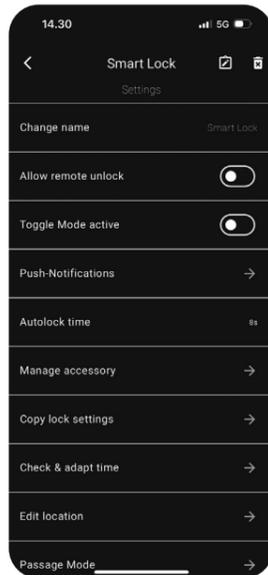


2. Click the green symbol in the lower right corner and choose the type of accessory you wish to add to the lock.

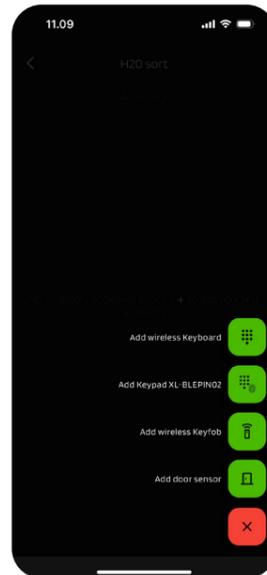


3. Follow the steps on Keypad 02
Press *813# on the keypad
Enter your admin PIN, followed by #
Press 1# to complete the process

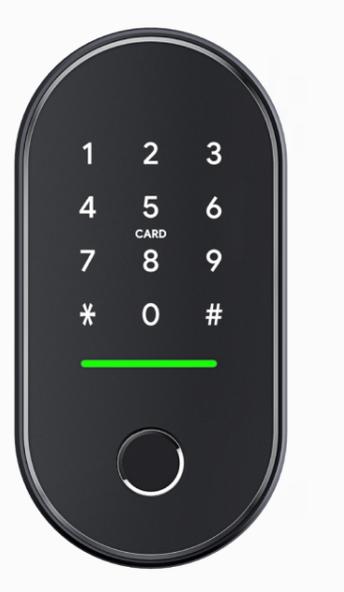

4. Follow the instructions given in the app and press "+".

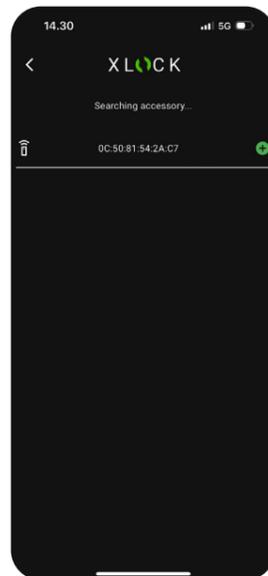

5. Give the Keypad 02 a name and press ADD. Your Keypad is now connected to the lock.

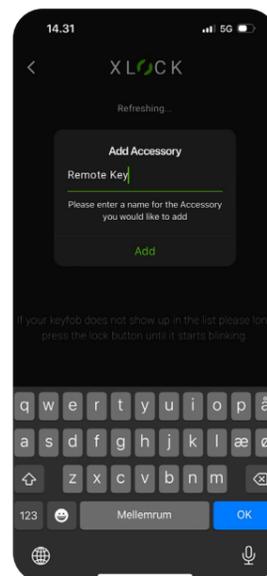

// HOW TO RESET THE KEYPAD

- Delete the keyboard in the app
- Remove the battery
- Press and hold the button on the back, then insert the battery
- Keep holding the button until a signal sounds
- The Keypad is now reset and ready for a new pairing